

Original Research Article

Identification and Characterization of Natural Habitats of Electrochemically Active Bacteria

ABSTRACT

Aims: This study aims to define criteria for the main physical and chemical characteristics of the environmental niches populated with electrochemically active microorganisms, capable to perform anaerobic respiration and potentially used in bio-electrochemical systems such as Microbial Fuel Cells.

Study design: In this study, specific parameters of the ~~quality of the environment in~~ water bodies (~~such as~~ lakes, streams, etc) and their bottom layers are analyzed. ~~The m~~Main parameters of interest ~~include are~~ the concentration of dissolved oxygen in the water column, the organic matter content in the sediments and the presence of alternative electron acceptors (~~such as~~ iron and manganese ions) ~~in order~~ to support anaerobic respiration. Sediment microorganisms are characterized for their electrochemical and biodegradation activity.

Place and Duration of Study: The ~~tested~~ sediment and water samples were collected from "Poda" Protected Site located on the outfall of Lake "Uzungeren", south of City of Burgas, BULGARIA

Methodology: The samples were analyzed ~~employing by~~ TGA, ICP and microbiological methods, ~~focusing on to be characterized in terms of~~ chemical, physical and biological conditions available for anaerobic respiration in this ecological niche.

Results: ~~The results show a~~~~We established~~ very low ~~concentration of~~ surface dissolved oxygen ~~concentrations~~ (from 1.4 to 2.2 mg/dm³ in ~~various~~~~the different~~ locations) ~~in the tested water samples~~. The conductivity and the pH values measured were relatively high and the mean values obtained are 5230 μ S/cm and 8.2 respectively. The sediment samples demonstrated very high organic matter content (22.5% of the dry mass) and relatively high levels of iron and manganese.

Microbial ~~F~~uel ~~C~~ell powered by mixed bacterial culture isolated ~~of form the tested~~ sediment demonstrated stable performance reaching power density of 3.5 W/m² and the COD removal rate of 42 mgO₂/dm³ per day

Conclusion: The results confirms the initial hypothesis that electrochemically active microorganisms are available in environments with high concentration of organic matter, iron and manganese in combination with low availability of dissolved oxygen. Mixed culture of anaerobic bacteria isolated from the tested sediment sample was successfully implemented to power Microbial Fuel Cell

Keywords: microbial fuel cell, anoxic respiration, lake sediments

1. INTRODUCTION

Since in the past few years, anaerobic digestion has been employed as a main biotechnological approach to recover energy from the waste organic matter ~~was the anaerobic digestion, and that occurs by which~~ converting the complex organic compounds into methane containing biogas [1]. ~~As in~~ a second stage, methane ~~has needs~~ to be enriched and then converted into electricity ~~throughby~~ combustion in cogeneration systems. Recently, an alternative method for direct recovery of waste streams into electricity by Bio-electrochemical processes was ~~discovereddemonstrated fromin~~ many research studies and ~~the so-called~~ Microbial Fuel Cells (MFC) are the most popular example in this regard [2]. In this type of reactors, simultaneously with the wastewater treatment, organic pollutants equivalent to 1kg of COD could be converted to up to 4 kWh electrical energy [3]. This is possible due to the presence of ~~the so-called~~ electrogenes, i.e. bacterial species that usually form electrochemically active biofilm on the MFC electrode surface [4].

~~According toForm the~~ biochemical point of view, there is huge ~~fundamental~~ difference between the conventional anaerobic digestion and ~~Bbio~~-electrochemical processes even though both processes are anaerobic. Anaerobic digestion is predominantly fermentative transformation of the substrates without involvement of any more complex electron transport mechanisms for ATP synthesis. ~~On the C~~ontrary, in the MFC ~~Microbial Fuel Cell~~, a respiratory type of metabolism with all its benefits is expressed.

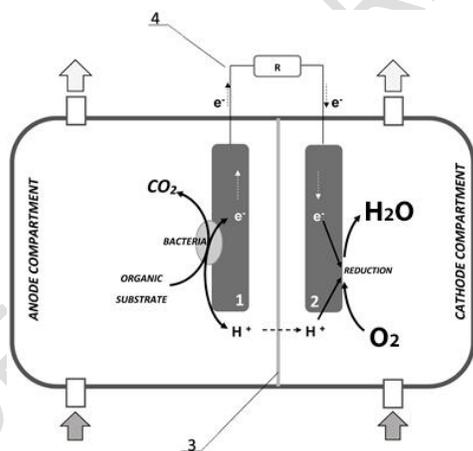


Figure 1. Experimental design and construction of the microbial fuel cell used in the experiments: 1 – anode; 2 – cathode; 3 – proton exchange membrane; 4 – external electric circuit.

Anaerobic cellular respiration is similar to aerobic cellular respiration in that electrons extracted from a fuel molecule ~~(substrate or in our case the~~ pollutants in the treated wastewater) are passed through an electron transport system, thus enducingdriving ATP synthesis. The only difference between the two processes is the terminal electron acceptor in the anaerobic digestion system due to the absence of these oxygen attributed to is not available due to the anaerobic conditions. Anaerobic respiration is a part of the biochemical mechanisms producesbehind the globa atmospheric nitrogen, iron, sulfur, and carbon cycles

Comment [O1]: How???

Comment [O2]: What do you mean???...rephrase thos sentence bes it doesn't make sense!!!

Comment [O3]: Stop with your "so called"

Comment [O4]: Write in full and put this in brackets...the next time you use ATP

Comment [O5]: What is this???

Comment [O6]: Doesn't seem right!!!...i think it is a substrate!!!

through the reduction of the oxyanions of nitrogen, sulfur, iron etc. to (more-reduced) compounds. These processes occur in a variety of many environments, including freshwater and marine sediments, soil, sub-surface aquifers, deep sub-surface environments, and biofilms [5].

Comment [07]: What's this???

In the MFC reactors, the organic substrates present are oxidized in the anode compartment are oxidized in absence of oxygen. Under these conditions, the anode becomes itself is a terminal electron acceptor due to its high electrode potential. The electrochemically active microorganisms which driving the process are able to transfer the electrons obtained from the decomposition of the organic molecules directly to the surface of an anode; surface which involves specific transfer mechanisms (direct "surface to surface" transfer or chemically mediated electron transport) [6,7];. Then electrons then flow through an external electric circuit to the cathode where they are consumed in variety of cathode reactions such as reduction of metal ions or oxygen (Fig 1).

Comment [08]: By what???

The implementation of a technology the above-mentioned technology is strongly dependent upon by the specific metabolic activity projected by the electrochemically active biofilms. Isolation and characterization of the electrogenic bacteria is a crucial step toward the improvement and commercialization of the Bio-electrochemical processes such as MFC. In this case sense, this study aims at defining the criteria for the main physical and chemical characteristics of the environmental niches populated with electrogenes, which can will improve the future identification of potential habitats and sampling sources of microorganisms with this specific activity.

2. MATERIAL AND METHODS

2.1 GENERAL ANALYTICAL METHODS

The tested sediment investigated and in this study consists of the were samples which were collected from the bottom of "Poda" Protected Site located on the outfall of Lake "Uzungeren", south of City of Burgas, BULGARIA (42°26'42.2"N 27°27'56.0"E).

The temperature, pH, dissolved oxygen and conductivity of the water were measured *in situ* with Hach HQ30D Portable Multi Meter.

The chemical oxygen demand (COD) was measured using HACH Lange cuvette tests (Product ID: LCK 314) and HACH Lange DR 3900 spectrophotometer.

2.2 THERMAL GRAVIMETRIC ANALYSIS (TGA)

NETZSCH STA 449 F3 TGA-DSC analyzer was used for the determination of the water and total organics content of the sediment samples. The procedure was conducted under the following conditions: Temperature range of 25-600 °C, heating rate 15 °C/min and α -Al₂O₃ as reference. The mass loss of was plotted as a function of temperature.

Comment [09]: Is this not filtrate???

2.3 PLASMA ATOMIC EMISSION SPECTROSCOPY (ICP-OES)

The sediment samples were dried in a vacuum oven (Salvis Rotkreuz, Switzerland), for 24 h at 40°C/105°C. In the next step a precise weighing scale XS 205 DualRange (Mettler-Toledo GmbH (Giessen, Germany) was used to measure the weight of the dried samples. Afterwards the dried the samples were pulverized with a ball mill MM 301, Retch (Haan, Germany).

The dried and pulverized samples were dissolved ~~by a treatment with in a~~ aqua regia, which involved 1 ml of HNO₃ and 3 ml of HCl, purchased from Sigma-Aldrich (St.-Louis, MO, USA), and microwave extraction (Milestone S.r.L., Sorisole, Italy). The last preparation step includes filtration and dilution in 0.5 ~~Mmolar~~ HNO₃.

Formatted: Subscript

Formatted: Subscript

The filtered sediment and water samples were analysed by inductively coupled plasma atomic emission spectroscopy (ICP-OES) using a Spectroblue SOP (Spectro Analytical Instruments GmbH, Kleve, Germany). The operating parameters of the ICP-OES can be seen in Table 1.

Comment [O10]: Is this not the second filtrater???..how do you measure the sediment using ICP???

Table 1. ICP-OES operating parameters.

Comment [O11]: This table is unnecessary, delete!!!

Parameter	Value
Plasma	Argon
Power	1400 W
Coolant flow	13 dm ³ /min
Auxiliary flow	1 dm ³ /min
Nebulizer flow	0.75 dm ³ /min

The samples were diluted with 1% nitric acid and the quantification was achieved using element standards (Sigma-Aldrich, St.-Louis, MO, USA).

2.4. GROWTH MEDIUM AND MICROBIAL CULTURE PREPARATION

The enrichment of the mixed culture was performed in anaerobic conditions by inoculation of 0.5 dm³ sediment in 20 dm³ LB nutrient (10 g/dm³ tryptone, 5 g/dm³ yeast extract and 5 g/dm³ NaCl, pH 7) containing 15 g/dm³ glucose. After 96 hours of cell growth, the enriched culture was suspended in fresh nutrient medium (5 g/dm³ LB + 1 g/dm³ acetate instead of glucose to avoid fermentative metabolism) to a microbial concentration of 10⁷ CFU/dm³ and loaded in the anode chamber of the MFC. The process was conducted at 18 °C. The initial organic load of the medium is equivalent to COD 464 mgO₂/dm³.

Comment [O12]: Whatt's this???

2.5 MFC CONFIGURATION AND OPERATION

The MFC used in this study was assembled as a cylindrical plastic reactor consists of two chambers separated by Nafion® 424 perfluorinated proton exchange membrane. The cell segments ~~wereare~~ equipped with the respective sampling and gas/liquid transport ports. The electrodes ~~wereare~~ 30mm in diameter ~~and are~~ made of carbon cloth with stainless steel current collectors. They ~~wereare~~ connected with external electric circuit loaded with 1000 Ohms resistor. The volumes of cathode and anode chambers ~~wereare~~ 40 dm³. 2 % solution potassium ferricyanide ~~is~~ used as catholyte.

Formatted: Superscript

2.6 ELECTROCHEMICAL ANALYSES

Metrohm Autolab PGSTAT101 apparatus and NOVA 2.1 software were used fir cyclic voltammetry in potentiostatic mode with the anode and cathode connected as working and counter electrode respectively. The electrical parameters (open circuit voltage, current and resistance) of the MFC ~~wereare~~ measured by ~~Aa~~uto ranging digital multimeter Model MY-66.

All measurements are performed in triple and the results presented here are mean values.

All chemicals used in this study were of the highest purity grade available (Sigma - Aldrich). The results presented in the tables and graphics are mean values of three replicates.

3. RESULTS AND DISCUSSION

The initial hypothesis in this study was that electrochemically active microorganisms capable of anoxic respiration would be present in an environments with low oxygen concentration, high organic content and the presence of potential alternative electron acceptors to be reduced. In order to check this suggestion, the study we identified (a near water body), which eventually meets all three criteria.

Comment [O13]: What's this???

3.1. SEDIMENT CHARACTERISATION

During the sample collection, the main physical parameters of the water were measured *in situ*. The results obtained showed that the lake is characterized by very low surface concentration of dissolved oxygen concentration varying from 1.4 to 2.2 mg/dm³ in the different locations. The conductivity and the pH values measured were relatively high reaching the mean values of 5230 µS/cm and 8.2 respectively (at 18 °C). The higher values of conductivity is indicative of evidences the higher concentration of dissolved organic and inorganic substances, which corresponded to the initial expectations, especially taking into account the very low oxygen content.

Comment [O14]: Which water???

Comment [O15]: Where???, figs or tables!!!

Place Fig. 2 here

The sediment sample obtained was analyzed for its organic matter content. The TGA results showed intensive mass change in the interval of 30 to 105 °C (Fig. 2, the green line) which corresponds to the water content of the sample. The next, more Another distinctive noticeable mass change was observed between 260 and 520 °C, as which could be attributed addressed to the combustion of the organic compounds. In corroboration to that, As a support to this assumption, calorimetry detected increasing heat released from the sample in the same period (the dark blue line on the Fig. 2). According to the results obtained, the organic matter content of the sediment sample was 22.5% of the dry mass.

Comment [O16]: You mentioned already!!!

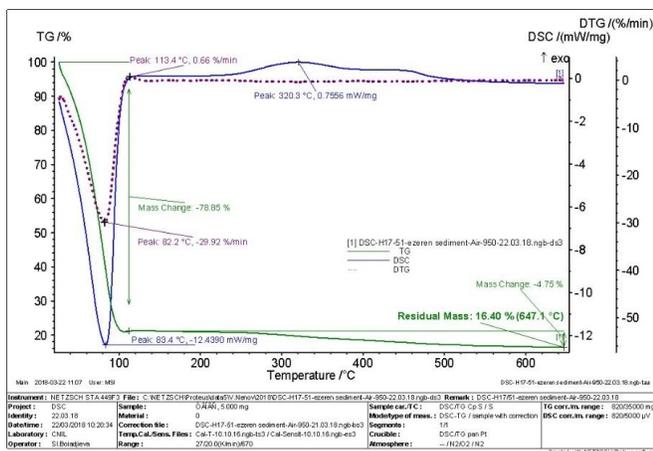


Figure 2. Thermogravimetric analysis data for Lake "Uzungeren" sediments used for estimation of the organic contents

Comment [O17]: Figure not clear!!!

Sediment biodiversity and biochemistry depends on organic carbon content. According to the adopted classification, organic content of about 20 to 25% is a high concentration and is typical for environments with active sediment metabolism [8]. The biodegradation

processes performed by the (benthic microbiome) are significantly more energy-efficient in the presence of suitable terminal electron acceptors such as dissolved oxygen. However, the lake bottom sediment are usually in anoxic condition and the sediment microorganisms depend on alternative acceptors for their energy and nutritional needs [9].

Comment [O18]: Qwhat is this??? How would the readers incorporate and have understanding without elebotion!!!

In order to discover the availability of potential alternative electron acceptors in this study, the sediment sample, ICP analysis was performed. The results are summarized in Table 2).

Table 2. Concentration of main elements present in the sediment and water samples used in the study.

Comment [O19]: I can pick up that you refer water to rwa water...correct the rest of the manuscript!!!

Comment [O20]: You mentioed above!!!

ELEMENT	WATER mg/dm ³	SEDIMENT mg/kg
B	2.151105	112.0807
Mg	775.974	7014.2490
Al	0.018349	8370
Si	2.543293	679.5351
P	0.372954	1537.3662
Cr	Not detected	34.1101
Mn	0.533521	395.0672
Fe	0.763587	30511.8976
Ni	Not detected	271.4268
Co	0.000387	14.4213
Zn	0.009713	124.9506
Cu	0.025476	256.4381
As	0.011003	4.6231
Se	0.023848	2.0683
Cd	Not detected	0.9390

Reducible iron and manganese forms in soil and sediments such as hematite, goethite, ferrihydrite, birnessite and pyrolusite are known to be thea subject of microbial reduction and solubilisation [10]. In this casesense, the observed high concentrations of Mn and Fe in the (Table 2)tested sample supports the conclusion that anaerobic respiration based on reduction of metal ions is possible in the studied environment.

Comment [O21]: You didn't explain the table..i don't understand its purpose!!!

3.2 BIO-ELECTROCHEMICAL ACTIVITY OF THE SEDEIMENT MICROORGANISMS

Mixed anaerobic bacterial culture was isolated from the sediment samples. At a later stage, this enriched culture was used as inoculum in the anode chamber of the lab-scale MFC in order to examine the electrochemical activity of the microbes in isolation.

Comment [O22]: Is this from???

The biofilm formation and its electrochemical activity was monitored by the so-called anode current values (result of the electron flow from the bacterial cell to the anode surface) which are measured by potentiostatic cyclic voltammetry with specific data processing. The higher the value, is better the biofilm performs (Fig. 3.)

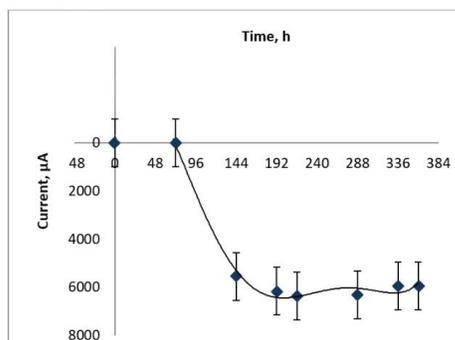


Figure 3. Biofilm development expressed as anodic current measured by the cyclic voltammetry

Starting from zero and after 48 hours of lag phase, the anode current started increasing significantly after the ^{third} day of cultivation in the MFC. This indicates a change in electrochemistry of the anode, probably due to the electrode colonization and biofilm growth. Reaching a plateau after a certain period is associated with the electrochemical stabilization of the system after the biofilm reached a “working” state of development [11, 12 and 13].

The MFC operation was evaluated by the electrical performance and COD removal rate. The open circuit voltage reached its maximal value of 277 mV after one week of cultivation, which correlates with the data for the biofilm formation. During this period, the power density reached 3.5 W/ m² (based on the anode surface) and the average COD removal rate observed was 42 mgO₂/dm³ per day.

Comment [O23]: You seem not to be referring your graph with the explanation of other authors!!!

Comment [O24]: Limited explanation...unconvincing!!!

4. CONCLUSION

In this study, a lake sediment samples were analyzed in terms of conditions supporting anaerobic respiration. The main goal was to identify the specific physical and chemical parameters of the environment which are associated with this type of metabolisms and to define criteria for identification of natural habitats of electrochemically active bacteria (also known as electrogenes). The results demonstrated that this type of organisms are available in the environments with high concentration of organic matter, iron and manganese in combination with low availability of dissolved oxygen. Mixed culture of anaerobic bacteria isolated from the tested sample was successfully implemented to power MFC and demonstrated stable performance in terms of electrochemical behavior and biodegradation characteristics.

Comment [O25]: Very limited information!!!

REFERENCES

1. Anukam A, Mohammadi A, Naqvi M, Granström K. A Review of the Chemistry of Anaerobic Digestion: Methods of Accelerating and Optimizing Process Efficiency. Processes. 2019;7(8): 504

2. Pham T, Rabaey K, Aelterman P, Clauwaert P, De Schampelaire L, Boon N, and Verstraete W. Microbial Fuel Cells in Relation to Conventional Anaerobic Digestion Technology. *Eng Life Sci.* 2006;6:285-292. doi:[10.1002/elsc.200620121](https://doi.org/10.1002/elsc.200620121)
3. Zhi W, Ge Z, He Z, Zhang H. Methods for understanding microbial community structures and functions in microbial fuel cells: A review. *Biores Technol.* 2014;171:461-468
4. Rabaey K, Verstraete W. Microbial fuel cells: novel biotechnology for energy generation. *Trends Biotechnol.* 2005;23(6):291-298
5. Slonczewski JL, Foster JW. *Microbiology: An Evolving Science*. 2nd ed. New York: W.W. Norton; 2011
6. Logan BE, Hamelers B, Rozendal R, Schroder U et al. Microbial Fuel Cells: Methodology and Technology. *Environ Sci Technol.* 2006;40:5181-5192
7. Reguera G, Nevin KP, Nicoll JS, Covalla SF, Woodard TL, Lovley DR. Biofilm and Nanowire Production Leads to Increased Current in *Geobacter sulfurreducens* Fuel Cells. *Appl Environ Microbiol.* 2006;72(11):7345-7348
8. den Heyer C, Kalff J. Organic matter mineralization rates in sediments: A within- and among-lake study. *Limnol Oceanogr.* 1998;43:695-705
9. Meyers PA, Ishiwatari R. Lacustrine organic geochemistry--an overview of indicators of organic matter sources and diagenesis in lake sediments. *Org Geochem.* 1993;20(7):867-900
10. Ehrlich HL, Newman DK. *Geomicrobiology*, 5th ed. New York: CRC Press; 2008
11. Fricke K, Harnisch F, Schroder U. On the use of cyclic voltammetry for the study of anodic electron transfer in microbial fuel cells. *Energy Environ Sci.* 2008;1:144-147
12. Rabaey K, Boon N, Siciliano SD, Verhaege M, Verstraete W. Biofuel cells select for microbial consortia that self-mediate electron transfer. *Appl Environ Microbiol.* 2004;70:5373-5382
13. Zhang T, Cui C, Chen S, Ai X, et al. A novel mediatorless microbial fuel cell based on direct biocatalysis of *Escherichia coli*, *Chem Comm.* 2006;21:2257-2259