

**RISK STUDY OF HYDROCARBON IMPACTED SURFICIAL SOIL AT THE HEAVY DUTY DIESEL GENERATOR PLANT IN DELTA PARK UNIVERSITY OF PORTHARCOURT, NIGERIA**

---

**Aim:** To analyse the potential risk of hydrocarbon polluted surficial soil, from a heavy duty generator plant at Delta Campus, University of Port Harcourt, Nigeria.

**Study Design:** Conceptual site model (CSM)

**Methodology:** CSM was designed and applied prior to sample collection in order to screen for heavy metals and other chemicals of concern (COCs) from three different high risk points. The CSM showed a credible source-pathway-receptor chain at three high risk points. Risk assessment associated with the heavy metals was significantly reduced based on Department of Petroleum Resources (DPR) – Environmental Guideline and Standards for the Petroleum Industry In Nigeria (EGASPIN) values after 28 days bioremediation study. Risk study should depend on the critical hazard detection and removal strategy should also be systematic and scientifically sound. The methodology should not only help in assessing the extent of contamination and associated risks at a site, but it should also be able to identify appropriate remediation technologies.

**Result:** The hazard quotient of the target (COCs) was less than one. This suggested that the study area had no significant effect on both Adult and children.

---

Key words: Conceptual Site Model (CSM) Heavy metals, Hazard Quotient, Risk analysis

## **1. Introduction**

Risk is a term used to suggest a tendency for danger especially under legislation (Dumitran and Onutu, 2010). It can be narrowly classified on the basis of health being health risk or the recipient, or receptor of the action or the severity of detrimental effect it has on the biota. The parlance of environmental regulatory bodies has adopted the use of high and low to define the potency of risk to man or other living things. Variables such as time, exposure route and receptor are currently represented in model equation as a predictive approach to risk evaluation (Andretta, *et al.*, 2006). Risk assessment is an evolving multi-disciplinary scientific discipline used to evaluate health and ecological risks associated with our being exposed to various chemicals of concern (COC). This evaluation is essential for formulation of remedial actions and risk-based management plans geared toward risk reduction. In other word, it is an approach to the determination of imminent risk caused by a pollutant to the environmental proxies. Innovations in risk-based studies have been tipped to serve a crucial role in the recovery, identification and application of risk studies. The environmental risk assessment involves calculating the probability for an ecosystem to receive a dose of pollutant or being in contact

with it. Quantitative risk assessment examines the dangers and consequence based on variables, which involves estimating the size of such consequences and probability of events (Kester and Brobst, 2005). Risk assessment is technically a cheap and effective approach in the determination of long-term effects on pollution (Karkush and Altaher, 2016). Hence, eco-recovery of impacted media is believed to serve geo-reference benefits. The benefit of this approach is that it offers an all-encompassing strategy ranging from site visit to pollutant.

The procedures employed are generally based on the contaminant-trajectory-receptor model (CONCAWE, 2003). It involves the examination of the site characteristics, the environmental behaviour and toxicity of the contaminants, the potential route of entry of the contaminants into the receptors (humans), the exposure of the receptors to the contaminants and their response to the dose. Thus, a baseline study of the environmental media is critical for risk definition. (Carlon *et al.*, 2001).

Impact of crude oil pollution is the most disturbing environmental challenge facing the world today (Nikhil *et al.*, 2013). Introduction of toxic contaminants associated with crude oil leaves a trail of challenges to the ecosystem both known and unknown. Recovery of crude oil pollutants from soil by extraction have been described to be sluggish, time consuming and less efficient. The mere presence of the pollutant on the polluted soil causes fluxes on the biodiversity of the soil. Diesel engine oil is a fraction of crude oil distillation. It solves a great portion of chemical energy need, since it is used in the running of heavy duty engines and vehicles. Transportation of these materials can pose challenges in the occurrence of spills. Diesel is dominated with non-volatile hydrocarbons than the volatile ones. It also has similar components with crude oil ranging from heavy metals to other derivatives (Bona *et al.*, 2011). It can cause a lot of detrimental effects on both flora and fauna. In addition to direct and indirect toxicity, the oil causes interference in the hydric relations of the plants either by asphyxiation or cell damage; this has been described to have an effect on the arability of soil for agricultural purposes. However, exposure of land to contaminants present affect plant growth and yield, although some other researchers have reported that the contaminants could biomagnify and pose more endangering threat (Zahir *et al.*, 2001). Spillage of used motor oils such as diesel or jet fuel contaminates our natural environment with hydrocarbon (Husain *et al.*, 2008). Hydrocarbon contamination in any environmental matrix could be associated with loss of genomic integrity and cancerous effects leading to loss in biodiversity and disruption of ecosystem especially by the major contaminants of concern (Cerniglia and Sutherland, 2001). Liver and kidney dysfunction and damage are associated with the prolonged exposure of animals and plants to contaminants (Loyld and Cackette, 2001). Because these compounds could be recalcitrant, chronic and life endangering consequences have been reported with its prolonged exposure (van Hamme *et al.*, 2003). The lack of standard practices in the disposal of tank sludge and transfer of the diesel oil into engines and generators could pose a serious threat in a long term exposure (Blodgett, 2001).

Routine evaluation of the impacted areas could give in depth knowledge on the trajectory of progress of the removal of the pollutants

### **Adverse Effects of Heavy metals and hydrocarbons intake**

Poor education and sensitization of the public on the causal effect of pollution have been identified as a leading cause of indiscriminate pollution of the environment. Daily discharge of toxicant by accidental or autochthonous approaches is alarming, another is the accident or

anthropogenic activities have left a trail of chronic damages to organs and tissues. Indexed pollutants are heavy metals and (PAHS) (Dash *et al.*, 2013). They cause a wide-range of health challenges from both acute and chronic exposure (Vinodhini and Naraynan, 2008). The PAHs are regarded as poisons and are toxic to both fauna and flora, thereby changing the population dynamics of the polluted environment (Mangwani *et al.*, 2014). Technological advancement has increased the concentration of heavy metals and toxicants as they impair body function in higher animals (Da silva and Williams, 2001). Microorganisms in the sediment, soil and water can absorb these toxicants via ingestion and inhalation of particles and metals. Heavy metals can cause damage to neurological depositions, chronic inflammatory disease and also cancer. Metal ions can be a factor to premature aging and other diseases (Chowdhury and Chandra, 2007).

### **Risk Assessment**

(Carlson *et al.*, 2001) suggested that risk assessment is a mechanism for resolution of challenges of associated with any kind of pollution. One of the critical elements used in the assessment is the source of the pollutant. This would be incomplete, without detailed site characterization, corrective actions (Sharma and Reddy, 2004). Risk can be categorized as unacceptable or acceptable. CONCAWE, (2003) suggested that this study quite an array of procedures.

Qualitative risk assessments are designed to give an in depth definition on the level of harm that could be exposed to, using the variables that define the point and nature of pollutant (Mark, 2007).

Quantitative risk assessment quantifies consequences using variables specific to the pollutant (Kester and Brobst, 2005). To do risk analysis due to environmental pollution generated by specific equipment on extraction, gas-oil separation activity the proposed methodology is divided into five modules, interrelated, each with a series of steps and stages of work.

## **Risk Assessment Methods**

This approach to risk estimation and categorization is divided into two, based on the United States Environmental Protection Agency (USEPA) and the American Society for Testing and Materials (ASTM), both are USA based standards.

### **USEPA Method**

The method of United States Environmental Protection Agency (USEPA) is human-health defined and it takes into account human exposure. This method consists of four steps:

- (1) Data collection and evaluation, (2) Exposure assessment, (3) Toxicity assessment
- (4) Risk characterization.

### **RBCA Method**

The risk-based corrective action (RBCA) method provides a procedure for risk assessment of petroleum contaminated sites (ASTM, 2002). This method integrates exposure and risk assessment practices with site assessment activities and remedial measurement selection, ensuring that the chosen action is protective of human and the environment. The RBCA process utilizes a tiered approach in which corrective action activities are tailored to site-specific conditions and risks (Sharma and Reddy, 2004). The risk assessment method consists of three tiers with increasing the gradation of difficulty and accuracy. This tiered approach will ensure that simple cases can be completed relatively quickly with minimum efforts and cost. More data collection and tests are required to assess the risk of complex cases and potentially serious situations. Information can be gradually expanded to reduce the uncertainty and subsequently improve the rationale for making a decision.

## **2. Materials and Methods**

### **Study Location**

The samples were obtained from the diesel generator house facility at Delta Park, University of Port Harcourt, points of the sample collection from Delta, were mapped using a pocket-size Global Positioning System (GPS) device (Fig.1)

### **Development of conceptual site model**

Montana Department of Environmental Quality, (2016) approach was adopted for risk and conceptual site model development. Information collected concerned receptors (Adults and Children, Adult workers, and Adults in industrial settings of the pollution, exposure pathways (proximity to potable water sources, farms and homes etc) and routes (ingestion, dermal contact or inhalation).

### **Sample collection**

The modified method of Karkush and Altaher, (2016) was employed in the collection of the soil samples in and around the diesel polluted site using a soil auger. Surficial soil within 0-500 meters from the polluted site. Soil samples were also obtained from pristine surficial soil. The samples were packed in sterile containers and transported in an ice chest to the laboratory of the Department of Microbiology, University of Port Harcourt.



Figure 1: Map of the Delta Campus, University of Port Harcourt, Rivers State. Constructed using the coordinates obtained from the Site Pre-visit and Inventorization process.

Designed at the *Department of Geography and Environmental Management*, University of Port Harcourt.

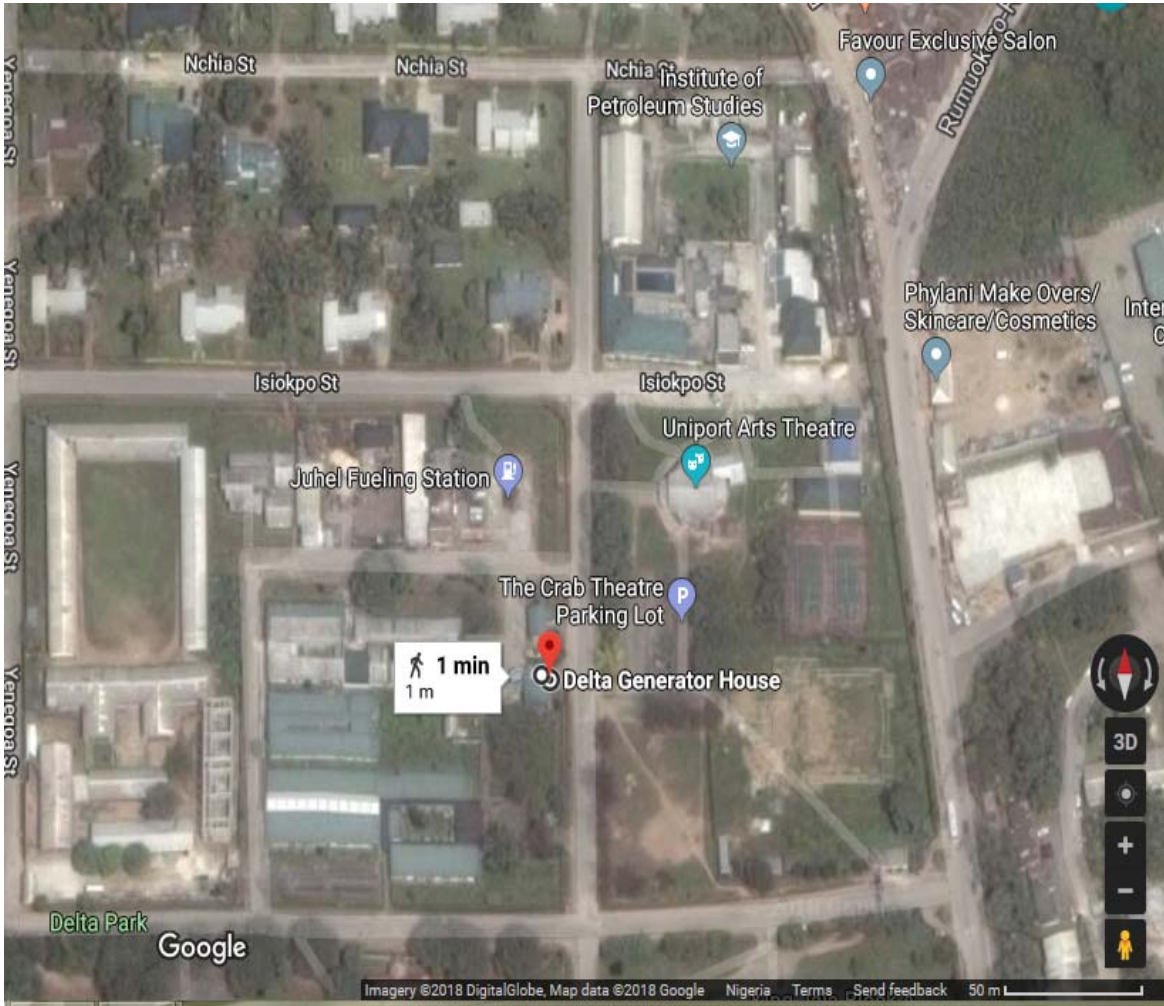


Figure 2: Google Map of Delta Campus, University of Port Harcourt, showing the location of the Heavy-duty Engines.

**Table 1: Geotechnical evaluation of soil samples obtained from heavy-duty diesel generator engine sites in Delta campus, UNIPORT.**

Geological attribute	Parameters	Site P1(PT)	Site P2 (200m)	Site P3(400m)	
Soil texture	Sandy (%)	8.04± 0.01 <sup>a</sup>	65.35± 0.007 <sup>c</sup>	31.9±0.134 <sup>b</sup>	
	Specific Gravity	2.61	2.53	2.72	
	Clay (%)	23.87± 0.02 <sup>b</sup>	18.58±0.19 <sup>a</sup>	53.67± 0.24 <sup>c</sup>	
	Silt (%)	68.14± 0.04 <sup>c</sup>	15.61± 0.36 <sup>b</sup>	14.2± 0.16 <sup>a</sup>	
	Soil type	Silty Loam	Sandy Loam	Silty Clay	
	Particle size (µm)	2-50	50-2000	0-2	
	Hydraulic Conductivity(m/s)	2.59± 0.023 <sup>b</sup>	12.41± 0.06 <sup>c</sup>	0.44± 0.012 <sup>a</sup>	
	Permeability (mL/s)	0.22± 0.15 <sup>b</sup>	0.75± 0.02 <sup>c</sup>	0.01± 0.00	
	Atterberg's Limit	Liquid Limit (wt %)	7.92± 0.038 <sup>b</sup>	2.05± 0.02 <sup>a</sup>	17.5± 0.09 <sup>b</sup>
		Plastic Limit (wt %)	2.84± 0.02 <sup>c</sup>	1.94± 0.23 <sup>a</sup>	2.09± 0.012 <sup>b</sup>
Plasticity Limit (wt %)		5.25± 0.13 <sup>b</sup>	0.043± 0.003 <sup>a</sup>	15.37± 0.03 <sup>c</sup>	
Description		Slightly plastic	Non-plastic	Medium Plastic	

**Note I:** Concentrations/ Numeric values are triplicate Mean+ Standard error; superscripts (alphabets) along the horizontal columns suggest correlational variance at p-values < 0.05. Hence, similar superscript suggest there is no significant difference, whereas, superscripts a, b and c also indicate the proximity to  $\alpha < 0.05$ . **Note II:** Uniport: University of Port Harcourt, Rivers State.

**Qualitative risk analysis and Quantitative risk analysis of the site**

The method of Mannan (2012) was employed for qualitative risk analysis of the site. Causes, major effects, and possible preventive or corrective measures are identified and listed by performing a preliminary hazard analysis. The quantitative analysis of the site was employed in the calculation of the hazard quotients (HQ) from the specified exposure (ASTM, 2002).

**Conceptual Site Model (CSM) of Diesel Generator site, Delta Park, University of Port Harcourt.**

The result presented in Figure 3 examined the possible primary sources either from improper disposal or feed system. The conceptual site study took into consideration a possible leak or spills. The study also considered a possible transportation either from volatilization or run-offs or seepages. Other variables considered were exposure as a function of inhalation, dermal contact and ingestion. The target risks exposure to contaminants of concern namely total petroleum hydrocarbon, PCBs, BTEX and metals.

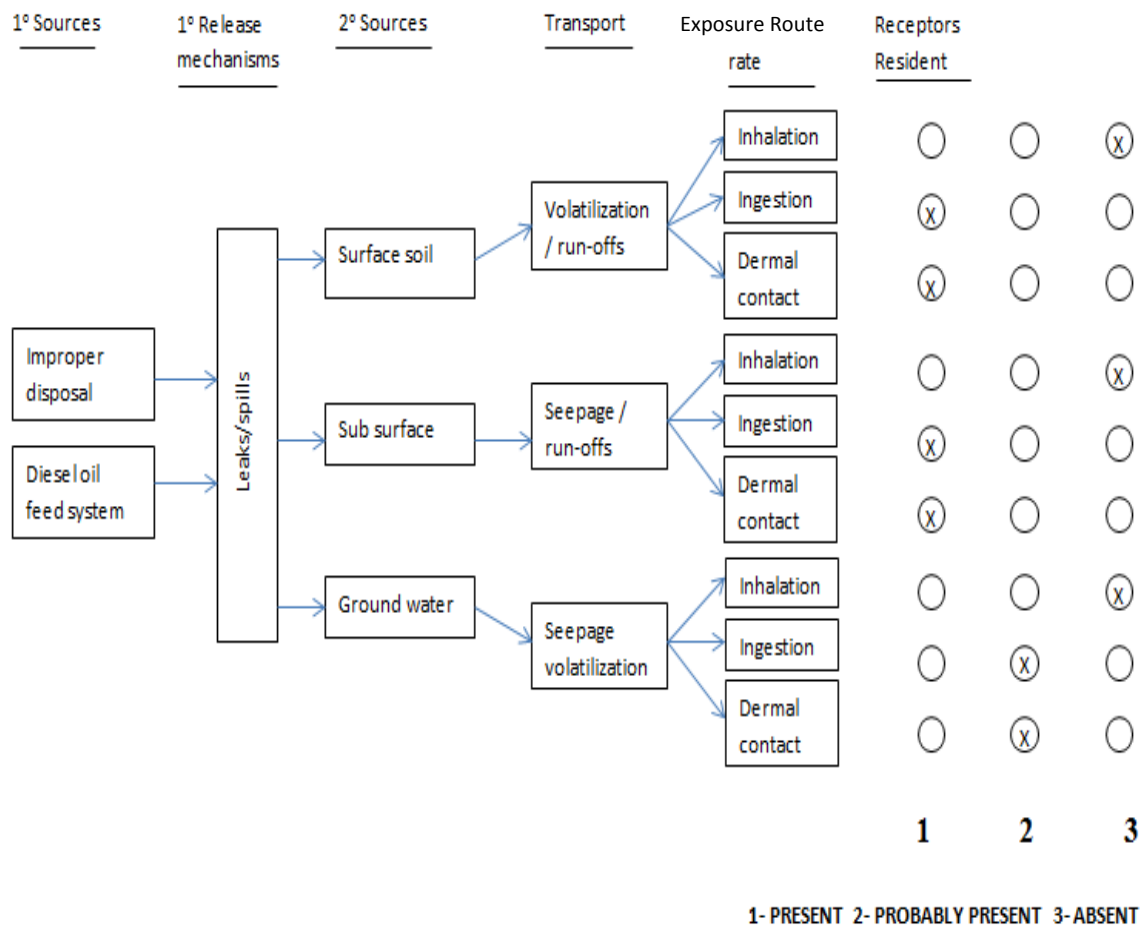


Figure 3 Conceptual site model of Delta Park Risk studies for TPH and Heavy metals



**Table 2. Qualitative Analysis of PCOCs for the study area**

	TPHs	PCBs	BTEX/VOC	Metals
Surface Soil	Δ	○	○	Δ
Sub-Soils	Δ	○	○	Δ

Δ = Is likely to be present and should be examined; ○ = Not Likely to be present

**Table 3: Baseline properties of Metals and TPH in soil samples obtained from heavy-duty diesel generator engine sites in Delta Park, UNIPORT.**

Parameters(units)	Site P1(0)	Site P2 (200 m)	Site P3(500 m)
<b>TPH (mg/kg)</b>	19692.1± 4.1 <sup>c</sup>	833.7± 6.76 <sup>b</sup>	31.0± 4.16 <sup>a</sup>
<b>PAH (mg/kg)</b>	3.94 <sup>b</sup>	1.14 <sup>a</sup>	<0.1
<b>Lead (mg/kg)</b>	15.3± 0.009 <sup>c</sup>	12.75± 0.13 <sup>b</sup>	11.28± 0.01 <sup>a</sup>
<b>Cadmium (mg/kg)</b>	6.14± 0.01 <sup>b</sup>	3.67± 0.07 <sup>c</sup>	5.11± 0.06 <sup>a</sup>
<b>Arsenic (mg/kg)</b>	4.53± 0.012 <sup>b</sup>	4.65± 0.015 <sup>c</sup>	1.44± 0.032 <sup>a</sup>
<b>Chromium (mg/kg)</b>	9.31± 0.008 <sup>b</sup>	9.61± 0.009 <sup>c</sup>	9.11± 0.07 <sup>a</sup>

**Note:** Concentrations/ Numeric values are triplicate Mean+ Standard error; superscripts (alphabets) along the horizontal columns suggest correlational variance at p-values < 0.05. Hence, similar superscript suggest there is no significant difference, whereas, the reverse suggest significant difference. Also, superscripts a, b and c also indicate the proximity to  $\alpha < 0.05$ .

## Calculation of Risk

The health risk associated with exposure of children and adult via dermal contact, inhalation and ingestion are calculated using the formula below as stated by Kamunda *et al.* (2016)

$$ADI_{ing} = \frac{C * IR * EF * ED * CF}{BW * AT} \dots\dots\dots (1)$$

$$ADI_{inh} = \frac{Cs * IR_{air} * EF * ED}{BW * AT * PEF} \dots\dots\dots (2)$$

$$ADI_{dems} = \frac{Cs * SA * FE * AF * ABS * EF * ED * CF}{BW * AT} \dots\dots\dots (3)$$

Where  $ADI_{dems}$  is the exposure dose via dermal contact in mg/kg/day,  $ADI_{ing}$  = exposure dose via ingestion in mg/kg/day and  $ADI_{inh}$  = exposure dose via inhalation in mg/kg/day.  $C_s$  is the concentration of heavy metal in soil in mg/kg,  $SA$  is exposed skin area in  $cm^2$ ,  $FE$  is the fraction of the dermal exposure ratio to soil,  $AF$  is the soil adherence factor in  $mg/cm^2$ ,  $ABS$  is the fraction of the applied dose absorbed across the skin.  $EF$ ,  $ED$ ,  $BW$ ,  $CF$  and  $AT$  are as defined in table below

**Table 4 Exposure parameters used for the health risk assessment through different exposure pathways for soil.**

Parameter	Unit	Child	Adult
Body weight (BW)	kg	15	70
Exposure frequency (EF)	days/year	350	350
Exposure duration (ED)	years	6	30
Ingestion rate (IR)	mg/day	200	100
Inhalation rate (IRair)	M <sup>3</sup> /day	10	20
Skin surface area (SA)	Cm <sup>2</sup>	2100	5800
Soil adherence factor (AF)	mg/cm <sup>2</sup>	0.2	0.07
Dermal Absorption factor (ABS)	none	0.1	0.1
Dermal exposure ratio (FE)	none	0.61	0.61
Particulate emission factor (PEF)	m <sup>3</sup> /kg	1.3 10 <sup>3</sup>	1.3 10 <sup>3</sup>
Conversion factor (CF)	kg/mg	10 <sup>-6</sup>	10 <sup>-6</sup>
Average time (AT)			
For carcinogens	days	365 70	365 70

Adopted from Kamunda *et al.* (2016)

$$HQ = \frac{ADI}{RfD} \dots\dots\dots(4)$$

HQ is a unit less number that is expressed as the probability of an individual suffering an adverse effect. It is defined as the quotient of ADI or dose divided by the toxicity threshold value, which is referred to as the chronic reference dose (RfD) in mg/kg-day of a specific heavy metal as shown in equation 4. Kamunda *et al.* (2016).

### Bioremoval of heavy metals

Bioremoval of Lead (Pb) presented in Figure 4 during the remediation of the diesel polluted soil. The samples obtained from the set amended with fungal consortium were observed to have reduced from 13.27 mg/kg to 11.85 mg/kg between the 0 to 28<sup>th</sup> day. Furthermore, the set amended with bacterial consortium had a lead (Pb) concentration decline from 13.27 to 11.02 mg/kg. The set up amended with consortia of the bacteria and fungi had reduced from 13.2 to 9.18 mg/kg while the control set up was observed to have a fairly constant concentration of lead.

Furthermore, Bioremoval of Arsenic (As) was monitored during the remediation study as presented in Figure 5. The soil samples amended with bacterial consortia was observed to be removed from 5.36 mg/kg to 4.91mg/kg. The experimental control of arsenic remained constant.

Bioremoval of chromium (Cr) was presented in Fig. 6, here the concentration of chromium was significantly reduced from 9.7 mg/kg to 3.62 mg/kg between 0-28 day was observed for the sample amended with bacterial and fungal consortia. In addition to that the sample amended with bacterial consortia alone reduced from 9.43 mg/kg to 5.7 mg/kg. The control experiment does not have any changes in concentration in chromium. Similarly result was observed for the response of the result were presented in figure 6.


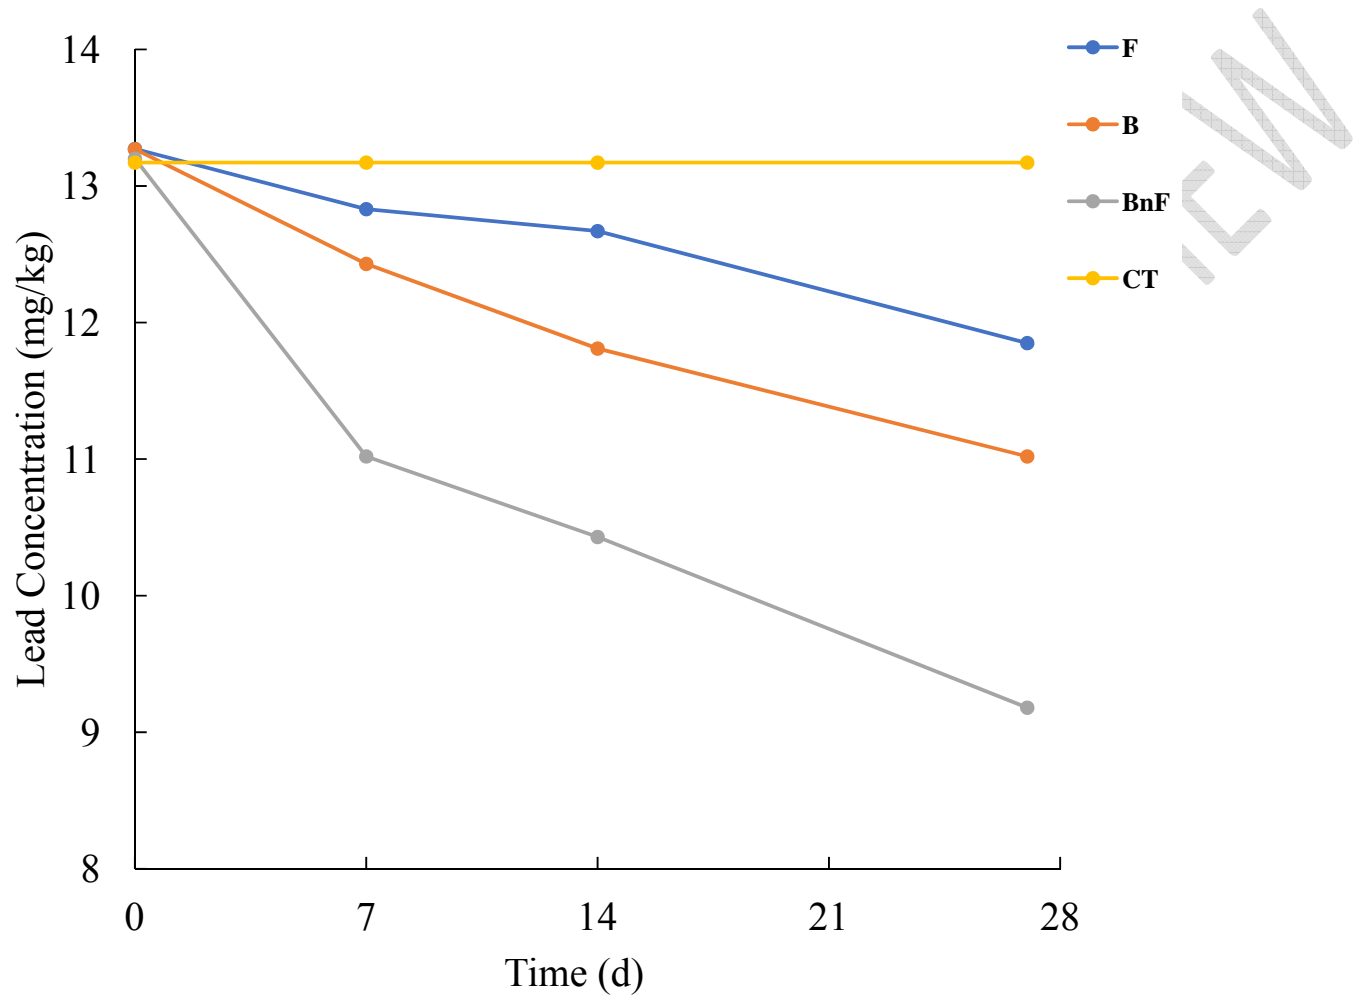


Figure 4 Concentration of Lead, (Pb) during the bioremediation of diesel polluted soil


Key: CT: Control; BnF: consortia of bacteria and fungi; F: Fungal consortia; B: bacteria consortia

UNDER PEER REVIEW

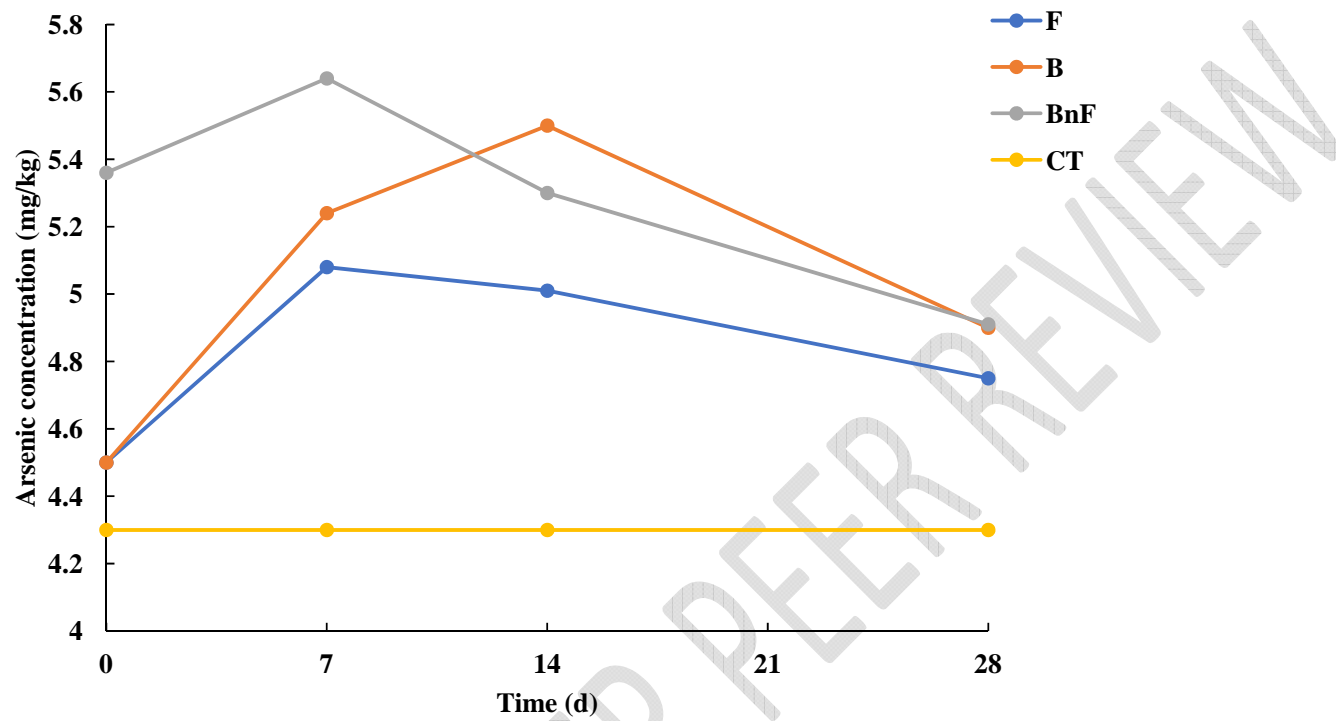

**Figure 5: Concentration of Arsenic, (As) during the bioremediation of diesel polluted soil**


Key: CT: Control; BnF: consortia of bacteria and fungi; F: Fungal consortia; B: bacteria consortia

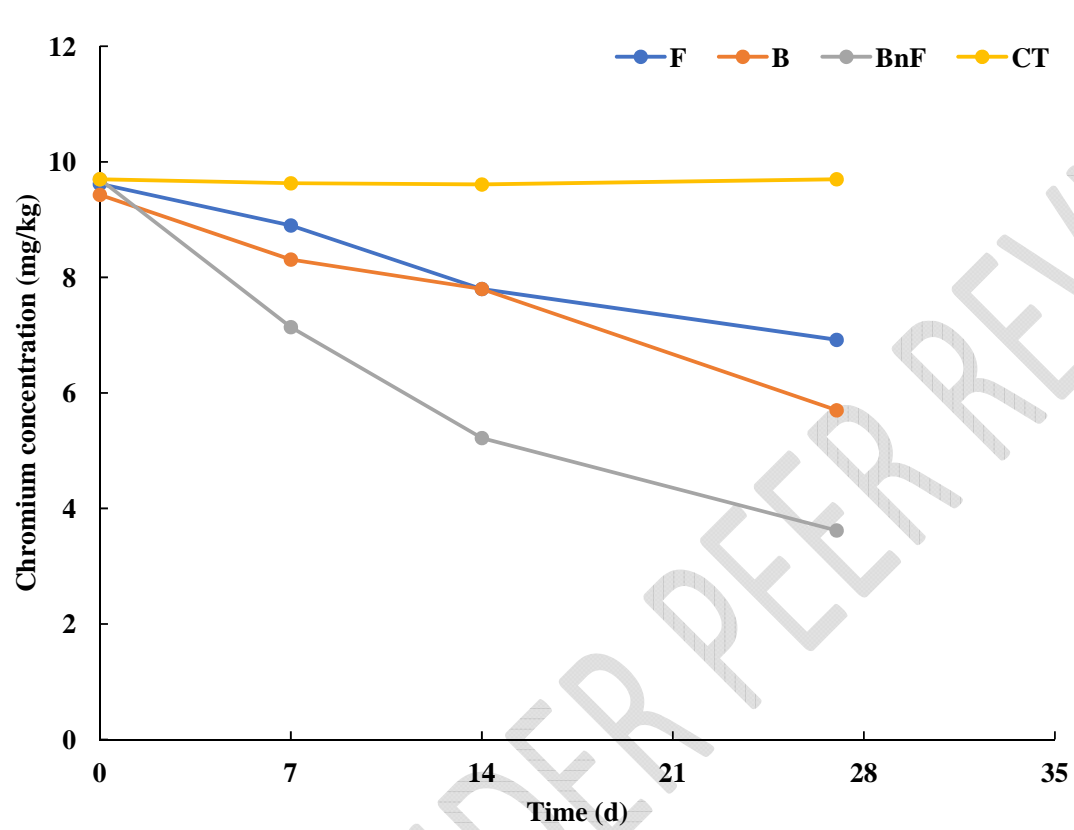

**Figure 6: Concentration of Chromium, (Cr) during the bioremediation of diesel polluted soil**

Key: CT: Control; BnF: consortia of bacteria and fungi; F: Fungal consortia; B: bacteria consortia



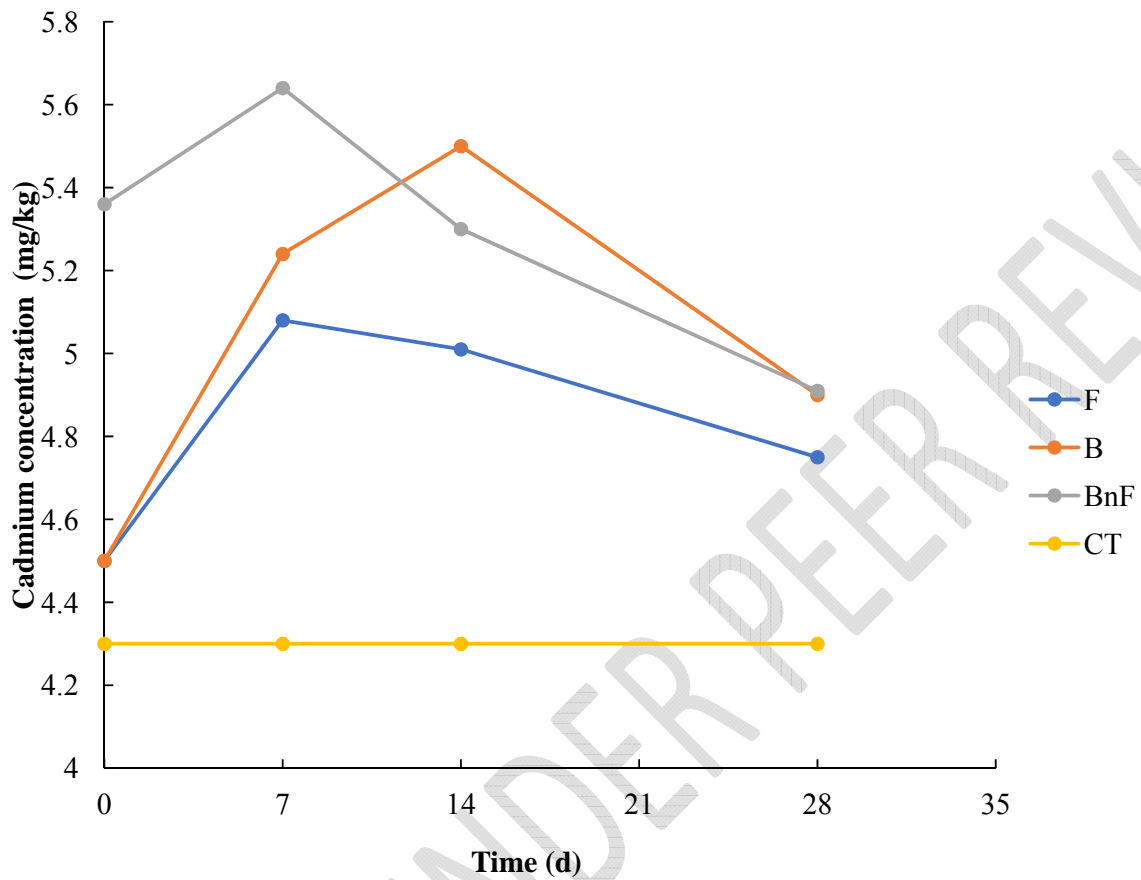

**Figure 7: Concentration of Cadmium, (Cd) during the bioremediation of diesel polluted soil**

Key: CT: Control; BnF: consortia of bacteria and fungi; F: Fungal consortia; B: bacteria consortia

Table 5. Risk Based Study at 28<sup>th</sup> day of Remediation

		ADI (Dermal contact)				HQ (Dermal contact)			
Receptor		0	7	14	28	0	7	14	28
Pb	Children	1.72E-06	1.6E-06	1.33E-06	1.92E-06	0.000210575	0.000210575	0.000251	0.000201216
	Adult	9.85E-07	9.16E-07	7.63E-07	1.09438E-06	0.003675643	0.003675089	0.003656	0.003647948
Cd	Children	6.32E-07	6.32E-07	7.52E-07	6.03649E-07	0.001263452	0.001263452	0.001505	0.001207299
	Adult	6.67E-07	6.88E-07	6.89E-07	6.03649E-07	0.001333644	0.001375759	0.001379	0.001207299
Cr	Children	1.01E-06	8.29E-07	5.26E-07	1.41035E-06	0.000894355	0.000736679	0.000468	0.001253647
	Adult	2.68E-06	2.21E-06	1.4E-06	3.76094E-06	0.000894355	0.000736679	0.000468	0.001253647
		ADI (ingestion)				HQ(ingestion)			
Receptor		0	7	14	28	0	7	14	28

---

<b>Pb</b>	<b>Children</b>	<b>5.2E-06</b>	<b>5.4E-06</b>	<b>5.38E-06</b>	<b>4.7-06</b>	<b>2.06621E-05</b>	<b>1.92596E-05</b>	<b>1.7E-05</b>	<b>2.14808E-05</b>
	<b>Adult</b>	<b>2.64E-08</b>	<b>2.64E-08</b>	<b>3.15E-08</b>	<b>2.526E-08</b>	<b>0.003856925</b>	<b>0.003595129</b>	<b>0.003175</b>	<b>0.004009741</b>
<b>Cd</b>	<b>Children</b>	<b>5.21E-06</b>	<b>5.37E-06</b>	<b>5.38E-06</b>	<b>4.71E-06</b>	<b>0.010410959</b>	<b>0.010739726</b>	<b>0.010762</b>	<b>0.009424658</b>
	<b>Adult</b>	<b>2.79E-08</b>	<b>2.88E-08</b>	<b>2.88E-08</b>	<b>2.526E-08</b>	<b>5.5773E-05</b>	<b>5.75342E-05</b>	<b>5.77E-05</b>	<b>5.04892E-05</b>
<b>Cr</b>	<b>Children</b>	<b>7.58E-06</b>	<b>6.25E-06</b>	<b>3.97E-06</b>	<b>1.061E-05</b>	<b>0.133044941</b>	<b>0.109589041</b>	<b>0.069599</b>	<b>0.186493631</b>
	<b>Adult</b>	<b>4.06E-08</b>	<b>3.35E-08</b>	<b>2.13E-08</b>	<b>5.69E-08</b>	<b>0.000712741</b>	<b>0.000587084</b>	<b>0.000373</b>	<b>0.000999073</b>

---

UNDER PEER REVIEW

## 4.0 Discussion

During the remediation of diesel polluted soil, the samples treated with bacterial consortia were observed to have a reduction in heavy metal concentration Lead (Pb) reduced from 13.27mg/kg to 11.85mg/kg for bacteria consortia while bacterial and fungi consortia reduced from 13.2mg/kg to 9.18 mg/kg. Arsenic (As) 5.36mg/kg to 4.91 mg/kg. Chromium (Cr) was reduced from 9.7 mg/kg to 3.62mg/kg and bacteria consortia above reduced from 9.43mg/kg to 5.7mg/kg. Ezemonye *et al.* (2006) reported that biostimulation can lead to uptake of metals. In their study vermicomposting coupled with effective biostimulation led to reduction in metals. Metal-binding proteins could be attributed for the success of the degradation.

The result revealed 8.04±0.001% of sample P<sub>1</sub> was sandy while 65.35%±0.007% of P<sub>2</sub> was sandy while 31.9±0.13% of P<sub>3</sub> was sandy. The soil sandy quality increased with increase of distance away of pollutant. P<sub>1</sub> was adjudged to have a clay content of 53.67% and P<sub>2</sub> was 23.87% and samples obtained from the 100m mark P<sub>1</sub> was also adjudged to have a high silt content of 68.14±0.04%. However, Patil *et al.* (2012) reported a particulate quality of clay 0.24%, sand 12.83 and silt quality of 86.42% and water holding capacity of 10.5% , pH of 6.74 and 7.54 for P<sub>2</sub>, Whereas in this study a pH of 6.19±0.009 was reported during the study. The pH reported could impact the bacterial diversity and degradation of pollutant

Risk is estimated on the basis of receptor i.e. the adult and children and several variables as described in table 5. The Hazard quotient 0.013 was reported for children while for adults were 0.014. Furthermore, cadmium with Average Daily Intake (ADI) of  $1.7 \times 10^{-6}$  mg/kg/day on day zero then reduced to  $1.9 \times 10^{-6}$  for children while adult recorded a reduction of  $6.6 \times 10^{-7}$  mg/kg/day to  $6.05 \times 10^{-7}$  mg/kg/day. Risk Average Daily Intake (ADI dermal contact) revealed Lead (Pb) reduced from  $5.2 \times 10^{-6}$  mg/kg/day to  $4.7 \times 10^{-6}$  mg/kg/day with a Hazard Quotient (HQ) of  $2.06 \times 10^5$  and  $1.7 \times 10^5$ . However the average daily intake of Chromium by children was observed to reduce from  $7.5 \times 10^{-6}$  mg/kg/day to  $1.06 \times 10^{-5}$  mg/kg/day and had a hazard quotient of 0.138 to 0.187. This was similar to the finding by Kamunda *et al.* (2016) who reported  $1.96 \times 10^{-4}$  mg/kg/day for chromium. According to USEPA (2004)  $1.0 \times 10^{-6}$  mg/kg/day to  $1.0 \times 10^{-4}$  mg/kg/day was acceptable for cancer risk. The cancer risk for this study was higher than regulatory limit for countries like South Africa. The opinion of Kamunda *et al.* (2016) suggests that hazard quotient (HQ) and hazard index (HI) greater than 1.0 suggests cause for risk and carcinogenic effect.

## REFERENCE

- Andretta, M., Serra, R., and Villani, M., (2006). A new model for polluted soil risk assessment. *Computers and Geosciences*, 32(7): 890-896
- ASTM, Reapproved, (2002) Standard guide for risk-based corrective action applied at petroleum release sites, E1739-95, West Conshohocken, PA. USA

- Blodgett WC (2001). Water-soluble mutagen production during the bioremediation of oil-contaminated soil. *Florida Scientist*. 60(1):28–36.
- Bona, E., Cattaneo, C., Cesaro, P., Marsano, F., Lingua, G., Cavaletto, M., et al. (2011). Proteomic analysis of *Pteris vittata* fronds: two arbuscular mycorrhizal fungi differentially modulate protein expression under arsenic contamination. *Proteomics*. 10; 3811–3834.
- Carlson C., A. Critto, A. Marcomini and P. Nathanail (2001). Risk based characterisation of contaminated industrial site using multivariate and geostatistical tools, *Journal of Environmental Pollution*, 111: pp. 417-427.
- Cerniglia CE, Sutherland JB (2001) Bioremediation of polycyclic aromatic hydrocarbons by ligninolytic and non-ligninolytic fungi. In: Gadd GM (ed) *Fungi in bioremediation*. Cambridge University Press, Cambridge, pp 136–187.
- Chowdhury, BA and Chandra, RK (2007). Biological and health implications of toxic heavy metal and essential trace element interactions. *Progressive Food Nutrition Science*. 11(1):55.
- CONCAWE, (2003) European oil industry guideline for risk-based assessment of contaminated sites (revised), Report no. 3/03, CONCAWE Water Quality Management Group, Brussels.
- Da Silva, J. J. R. F., and Williams, R. J. P. (2001). *The Biological Chemistry of the Elements*. Oxford University New York Press. 1-22
- Das K, Mukherjee AK (2007). Crude petroleum-oil biodegradation efficiency of *Bacillus subtilis* and *Pseudomonas aeruginosa* strains isolated from a petroleum-oil contaminated soil from North-East India. *Bioresource and Technology*. 98:1339-1345.
- Dash, H.R., Mangwani, N., Chakraborty, J., Kumari, S., Das, S., (2013). Marine bacteria: potential candidates for enhanced bioremediation. *Applied Microbiology and Biotechnology*. 97: 561-571.
- Dumitran C. and I. Onutu (2010) Environmental Risk Analysis For Crude Oil Soil Pollution. *Carpathian Journal of Earth and Environmental Sciences*, 5(1): 83 – 92
- Ezemonye LIN, Agbedia CU, Illechie I (2006) The effect of organic matter on the toxicity of Cu to earthworms (*Aporrectodea longa*). *African journal of Environmental Pollution and Public Health* 5(1):59–67
- Hejazi, R.F., Husain, T. and Khan, F.I. (2003). Landfarming operation of oil sludge in arid region- human health risk assessment. *Journal of Hazard and Materials*. B99:287-302

- Kamunda, C, Mathuthu, M and Madhuku, (2016) Health Risk Assessment of Heavy Metals in Soils from Witwatersrand Gold Mining Basin, South Africa. *International Journal of Environmental Research and Public Health*, 13: 1-11
- Karkush, M O and Altaher A (2016) Risk Assessment of AL-Nassyriah Oil Refinery Soil. *Journal of Civil Engineering Research*, 6(1):16-21
- Kester, G.B., Brobst, R. B., (2005). Risk Characterization, Assessment, and Management of Organic Pollutants in Beneficially Used Residual Products. *Journal of Environmental Quality*, 34 (1), 75-79.
- Lloyd, A.C. and Cackette, T.A. (2001) Diesel Engines: Environmental Impact and Control. *Journal of the Air & Waste Management Association*, 51:809-847
- Mangwani, N., Kumari, S., & Das, S. (2015). Involvement of quorum sensing genes in biofilm development and degradation of polycyclic aromatic hydrocarbons by a marine bacterium *Pseudomonas aeruginosa* N6P6. *Applied Microbiology and Biotechnology*. 99, 10283–10297.
- Mannan (2012): Lees' Loss Prevention in the Process Industries, Fourth Edition.
- Mark, M. (2007). Ethical issues in risk assessment and management. *International Journal of Risk Assessment and management*, 7 (3): 281-298
- MDEQ (2016). Risk Assessment Guide (2016). Montana Department of Environmental Quality, Helena, MT
- Nikhil, T., Deepa, V., Rohan, G, and Satish, B. Isolation, Characterization and Identification of Diesel Engine Oil Degrading Bacteria from Garage Soil and Comparison of their Bioremediation Potential. *International Research Journal of Environment Sciences*. (2013) 2(2): 48-52
- Patil, T. D., Pawara S., Kamble P. N. and Thakare, S. V. (2012) Bioremediation of complex hydrocarbons using microbial consortium isolated from diesel oil polluted soil. *Pelagia Research Library Der Chemica Sinica*, 3(4):953-958
- Sharma H. D. and Reddy K. R, (2004), Geoenvironmental engineering: site remediation, waste containment, and emerging waste management technologies, John Wiley & Sons, Hoboken, New Jersey. 1; 444-460
- USEPA (1989) U.S. Environmental Protection Agency. Risk Assessment Guidance for Superfund Volume 1: Human Health Evaluation Manual (Part A); Office of Emergency and Remedial Response: Washington, DC, USA.
- USEPA (2004). United States Environmental protection Agency. Estimation of relative Bioavailability of lead in Soil and Soil-Like Materials Using *In Vivo* and *In Vitro* Methods. OSWER-9285.7-77, Washington, DC.

Vinodhini R, and Narayanan M (2008). Bioaccumulation of heavy metals in organs of fresh water fish *Cyprinus carpio* (Common carp). *International Journal of Environmental Science and Technology*. 5(2):179-182

Zahir, Z.A.; H.N. Asghar, and M. Arshad (2001) Cytokinin and its precursors for improving growth and yield of rice. *Soil Biology and Biochemistry*. 33:405-408.

UNDER PEER REVIEW